

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number
WO 03/106856 A1

(51) International Patent Classification⁷: F16D 65/18, 65/14

(74) Agent: MORRALL, Roger; Automotive Products Group Limited, P.O. Box 2085, Tachbrook Road, Leamington Spa, Warwickshire CV31 3ZL (GB).

(21) International Application Number: PCT/GB03/02482

(22) International Filing Date: 11 June 2003 (11.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0213859.2 15 June 2002 (15.06.2002) GB

(71) Applicant (for all designated States except US): AUTOMOTIVE PRODUCTS ITALIA (SV) S.P.A. [IT/IT]; Corso Marconi 160, I-17014 Cairo Montenotte, Savona (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Published:


— with international search report

(72) Inventor; and

(75) Inventor/Applicant (for US only): PEASLEY, David [GB/GB]; 110 Needlers End Lane, Balsall Common, Coventry CV7 7AB (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PARKING BRAKE ASSEMBLIES WITH AUTOMATIC CABLE LATCHING

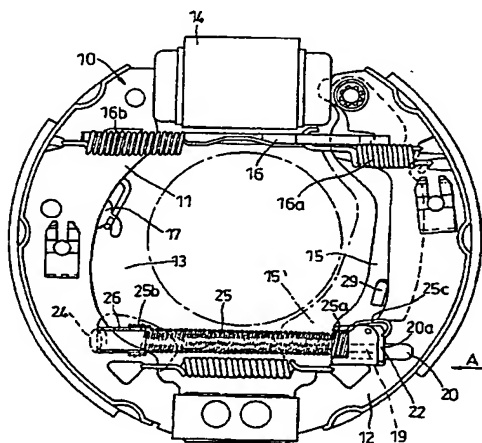

(57) Abstract: A parking brake assembly which includes a lever (15) for operation of a brake shoe (11, 12) to provide a parking function, the lever carrying an automatic latching device for automatically latching to the lever an end fitting (20) on an operating cable (19) and a guide spring (25) extending from an associated brake backplate (13) into contact with the lever. The automatic latching device is in the form of a latching member (22) mounted on the lever which is deflected aside by the end fitting as the cable is fed in a first direction towards the lever within the guide spring and which latches behind an abutment (20a) on the end fitting to latch the cable to the lever so that subsequent movement of the cable in a second direction opposite to the first direction moves the lever to operate the parking function. The end (25a) of the guide spring (25) which contacts the lever (15) is shaped (25c) to also act on the latching member (22) to bias the latching member towards the position in which it latches behind the abutment (20a) on the end fitting (20).

WO 03/106856 A1

PARKING BRAKE ASSEMBLIES WITH AUTOMATIC CABLE LATCHING

This invention relates to parking brake assemblies, hereinafter referred to as of the kind described, which include a lever for operation of a brake shoe to provide a parking function, the lever carrying an automatic latching device for automatically latching to the lever an end fitting on an operating cable and a guide spring extending from an associated brake backplate into contact with the lever, the automatic latching device comprising a latching member mounted on the lever which is deflected aside by the end fitting as the cable is fed in a first direction towards the lever within the guide spring and which latches behind an abutment on the end fitting to latch the cable to the lever so that subsequent movement of the cable in a second direction opposite to the first direction moves the lever to operate the parking function.

Such parking brake assemblies may form part of a drum brake (either with the conventional two shoes of a single generally U-shaped shoe as disclosed, for example, in EP 0392829A1) which provides a parking brake function only or also provides a service brake function or may form part of a drum-in-disc brake in which a radially inner parking brake drum is surrounded by a brake disc on which a disc brake caliper acts to provide the service brake function.

An example of a parking brake assembly of the kind described is disclosed in PCT patent application No. PCT/IB98/00306.

It is an object of the present invention to provide an improved form of parking brake assembly of the kind described.

Thus according to the present invention there is provided a parking brake assembly of the kind described in which the end of the guide spring which contacts the lever is shaped to also act on the latching member to bias the member towards the position in which it latches behind the abutment on the end fitting.

The latching member may comprise a flap pivotally mounted on the lever with the end of the spring which contacts the lever secured to the lever on one side of the flap and formed into a loop which extends over the flap pivot and acts on the other side of the flap remote from the remainder of the guide spring to bias flap to the latching position.

Preferably also the flap has a groove therein extending generally parallel to the pivot axis of the flap into which the end of the spring loop extends.

The invention also provides a drum brake which includes a parking brake assembly as described above.

The present invention will now be described, by way of example, with reference to the accompanying drawings in which:-

Figure 1 is a side view of a drum brake which includes a parking brake assembly in accordance with the present invention;

Figure 2 is a view in the direction of arrow A of figure 1 on a larger scale of details of the latching flap of the assembly;

Figures 3 and 4 show perspective view on a larger scale of the latching flap and the flap bias extension of the guide spring;

Figures 5 and 6 show details of the lower end of the handbrake lever and the latching flap;

Figure 7 shows details of the guide spring with its flap biasing extension;

Figure 8 shows a view in the direction of arrow B of figure 2, and

Figure 9 shows the cable latched in position by the flap.

Referring to figure 1 this shows a drum brake in which two brake shoes 11 and 12 are mounted on a backplate 13 for operation by an hydraulic cylinder 14 to provide a service brake function in the known manner. A parking brake function is provided in which pivoting of a parking lever 15 from the full line position shown in figure 1 to the dotted position 15' applies both shoes to the brake drum via a strut 16. Strut 16 which is held against shoe 12 at all times by spring 16a which extends between the brake shoes and, in addition to operating the parking brake, also limits the retraction of the shoes under the action of pull-off spring 16b. The effective length of strut is adjusted by the handbrake adjusting mechanism part of which is visible at 17 and which is more fully described in the Applicant's UK patent number 2272261.

The lower end of parking brake lever 15 is of U-shaped cross section to form a channel 18 (see figures 2 to 5) for the reception of the end of a handbrake operating cable 19 which has an end fitting 20.

Pivotaly mounted on the lever 15 by a pin 21 is a latching member in the form of a flap 22.

Backplate 13 is provided with an aperture 24 through which the actuating cable 19 is fed and a guide means in the form of a compression-type guide spring 25 extends between the aperture 24 and the end of the channel 18 in lever 15. The larger diameter end portion 25a of spring 25 is received as a direct friction grip in the U-shaped channel 18 whilst the other larger diameter end portion 25b grips the outside of a short rigid tubular guide 26 which is supported in aperture 24. Compression spring 25 also loads lever 15 to tend to return the lever to the non-operative full line position shown in figure 1 with tang 29 abutting the edge of shoe 12 when the handbrake function is released.

Also, in accordance with the present invention, end portion 25a of the guide spring is provided with a loop portion 25c which extends up over the pivot 21 of flap 22 and has an end portion 25d which engages a groove 30 in flap 22 to bias flap 22 to the so-called latching position shown in figures 1 to 4. Spring loop 25 also helps to hold the end portion 25a of spring 25 in channel 18.

Flap 22 also includes a tapering slot 31 which engages around a projection 18a formed on the lower portion of channel 18. Thus when end fitting 20 is in its latched position it occupies a position in which it is supported both by flap 22 and projection 18a.

In an alternative arrangement shown in figure 10 the end portion 25a of spring 25 is received in a recess 18b formed in channel 18. Spring loop portion 25c also holds the spring in recess 18b as well as biasing flap 22 to the latching position.

The attachment of the cable 19 to lever 15 is achieved as follows. The cable 19 with its end fitting 20 is fed through aperture 24 in backplate 13 and down the centre of guide spring 25 and into the end of channel 18 in lever 15. The end fitting then contacts the latching flap 22 and displaces the flap anti-clockwise about its pivot 21 as shown in figure 1. After the end fitting 20 has fully passed through the wider bottom portion of slot 31 in flap 22, flap 22 snaps back behind shoulder 20a on end fitting 20 to latch the cable between the lower edge of flap 22 and the edge of the channel 18 as shown in figures 8 and 9.

The present invention thus provides an improved form of parking brake assembly of the kind described in which the latching member is biased to its latched position by a bias means which is formed integrally with the guide spring. Such an arrangement reduces the number of separate parts in the parking brake assembly and reduces the likelihood of the latching member bias becoming disengaged during use of the parking brake assembly.

CLAIMS

1. A parking brake assembly which includes a lever for operation of a brake shoe to provide a parking function, the lever carrying an automatic latching device for automatically latching to the lever an end fitting on an operating cable and a guide spring extending from an associated brake backplate into contact with the lever, the automatic latching device comprising a latching member mounted on the lever which is deflected aside by the end fitting as the cable is fed in a first direction towards the lever within the guide spring and which latches behind an abutment on the end fitting to latch the cable to the lever so that subsequent movement of the cable in a second direction opposite to the first direction moves the lever to operate the parking function, the assembly being characterised in that the end of the guide spring which contacts the lever is shaped to also act on the latching member to bias the latching member towards the position in which it latches behind the abutment on the end fitting.
2. A parking brake assembly according to claim 1 in which the latching member comprises a flap pivotally mounted on the lever with the end of the spring which contacts the lever secured to the lever on one side of the flap and formed into a loop which extends over the flap pivot and acts on the other side of the flap remote from the remainder of the guide spring to bias flap to the latching position.
3. A parking brake assembly according to claim 2 in which the flap has a slot in a lower edge thereof, the end fitting passing from one side of the flap to the other as the flap is deflected by passing at least partially through the lower end of the slot.
4. A parking brake assembly according to claim 2 or 3 in which the loop of the spring also serves to hold the spring in its operational position on the lever.

5. A parking brake assembly according to any one of claims 2 to 4 in which the lever has an end portion in the form of a U-shaped channel, the flap latching the cable between an edge of the flap and a base portion of the U-shaped channel.
6. A parking brake assembly according to claim 5 when dependent on claim 3 in which a projection on the base portion of the U-shaped channel projects into the lower end of the slot in the flap so that the end fitting is supported in the latched position on the projection and the end of the U-shaped channel.
7. A drum brake which includes a parking brake assembly according to any one of claims 1 to 6.
8. A drum in disc brake which includes a parking brake assembly according to any one of claims 1 to 6.
9. A parking brake assembly constructed and arranged substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

Fig. 1


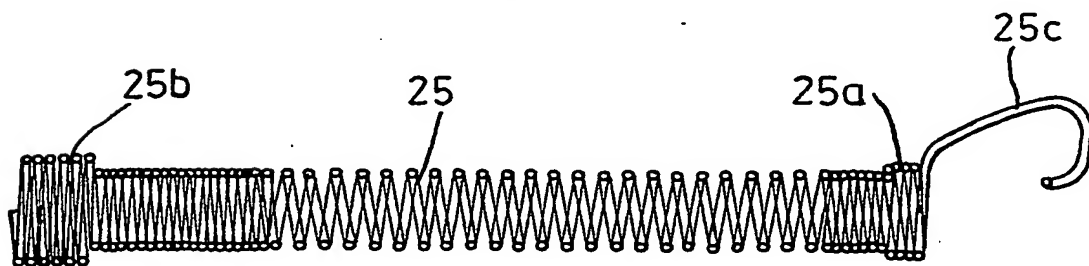


Fig. 7

2/6

Fig. 3

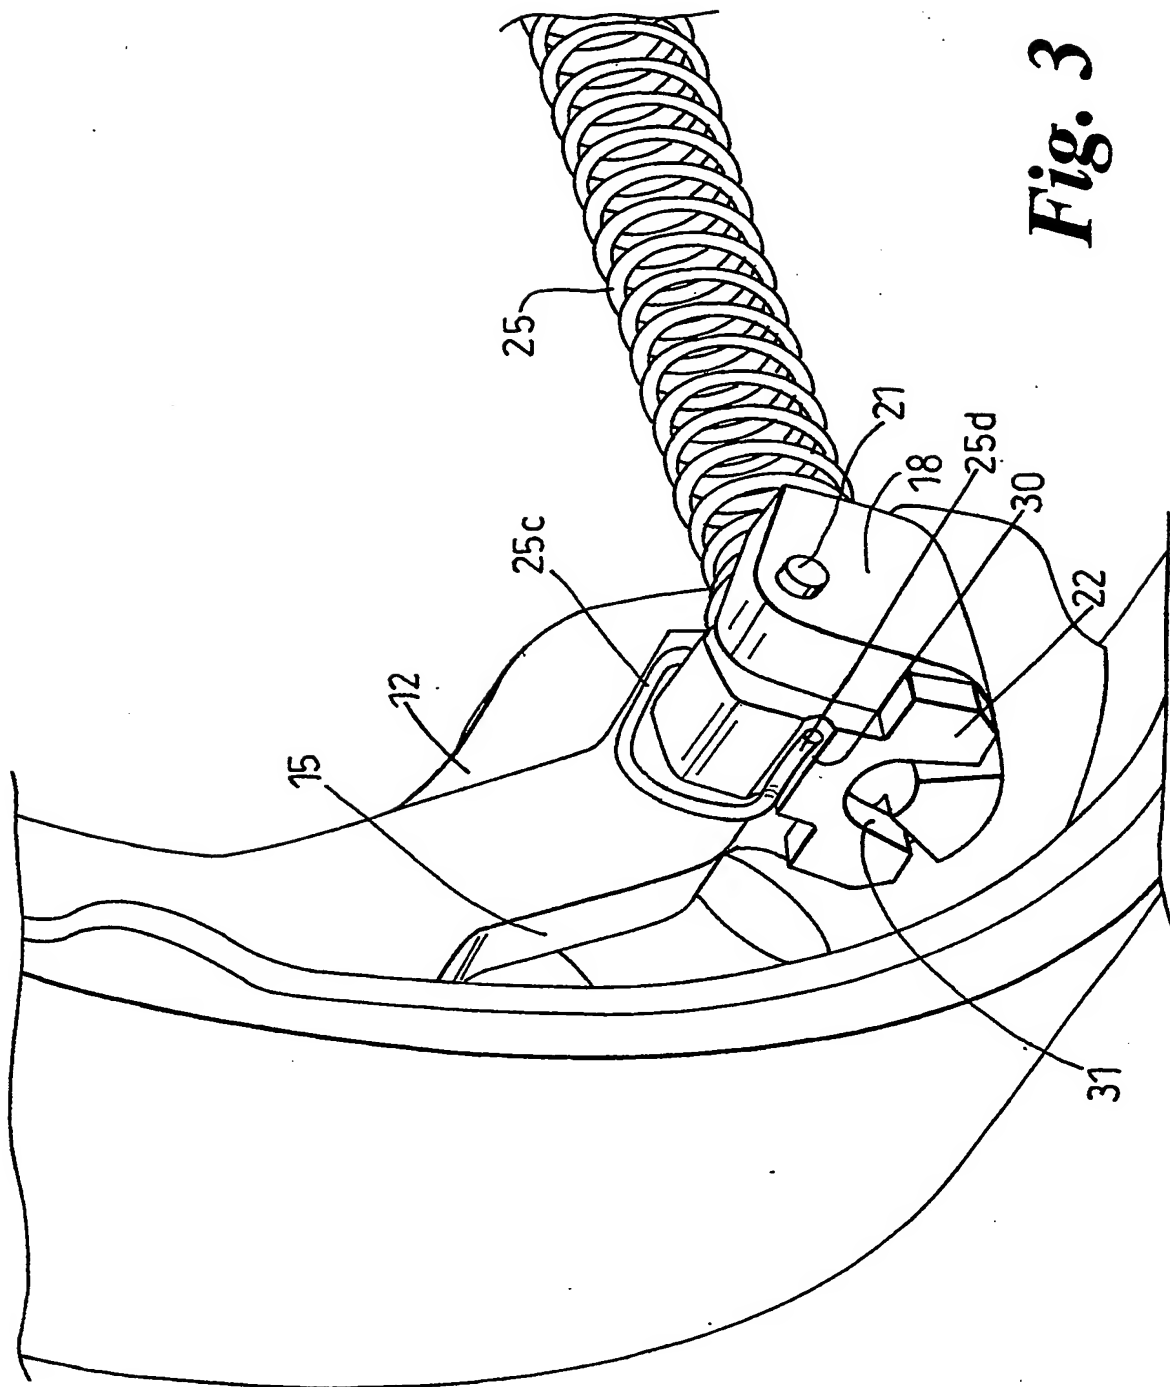

3/6





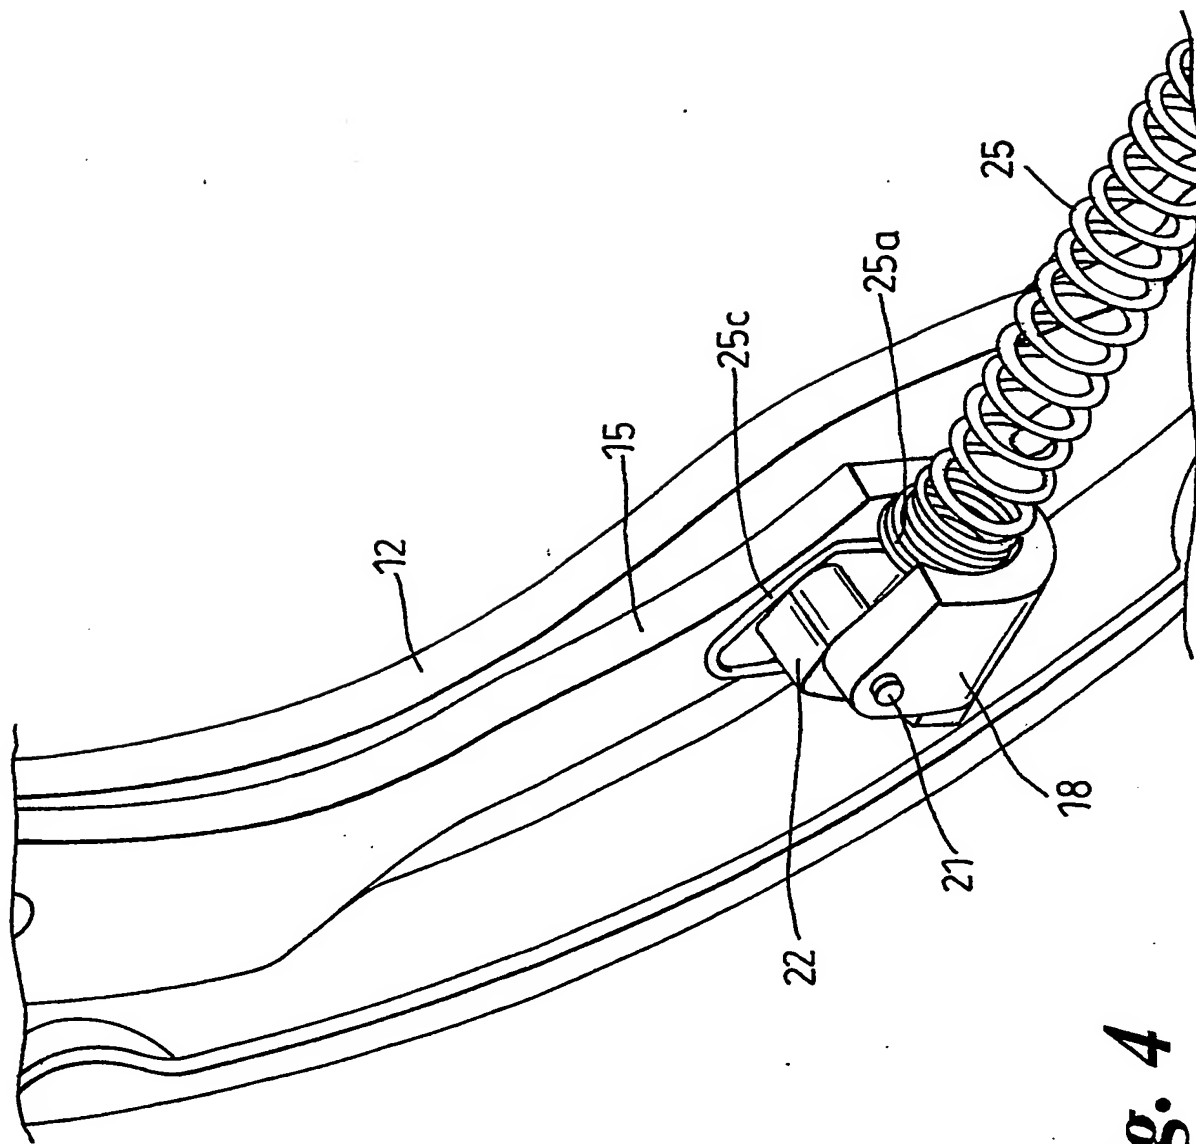


Fig. 4



4/6

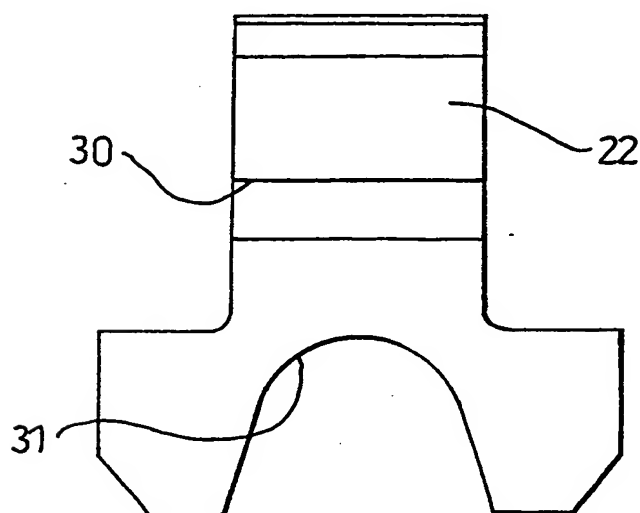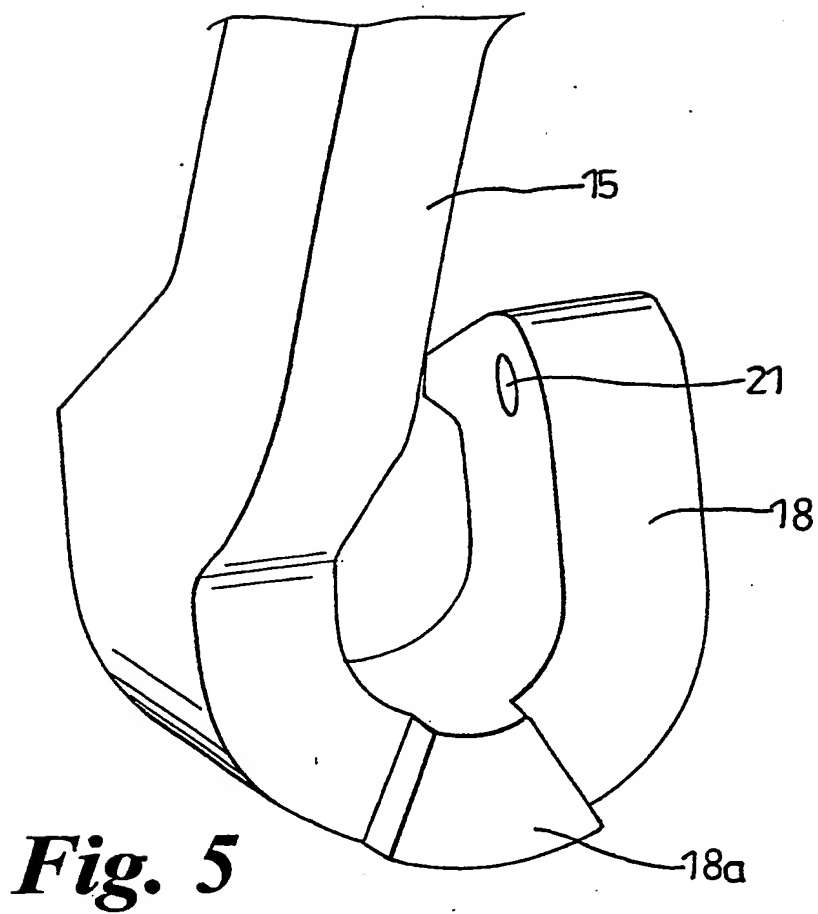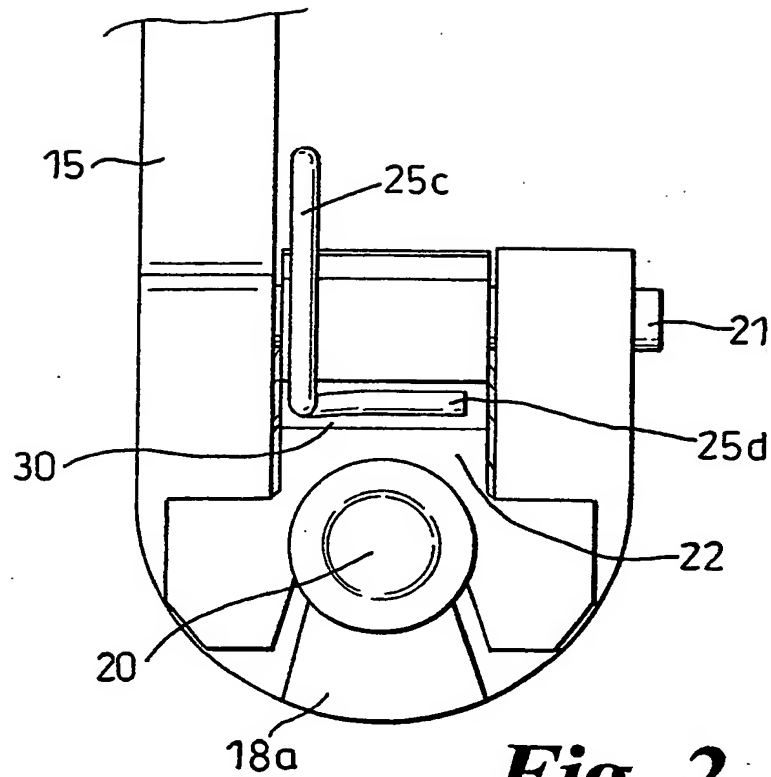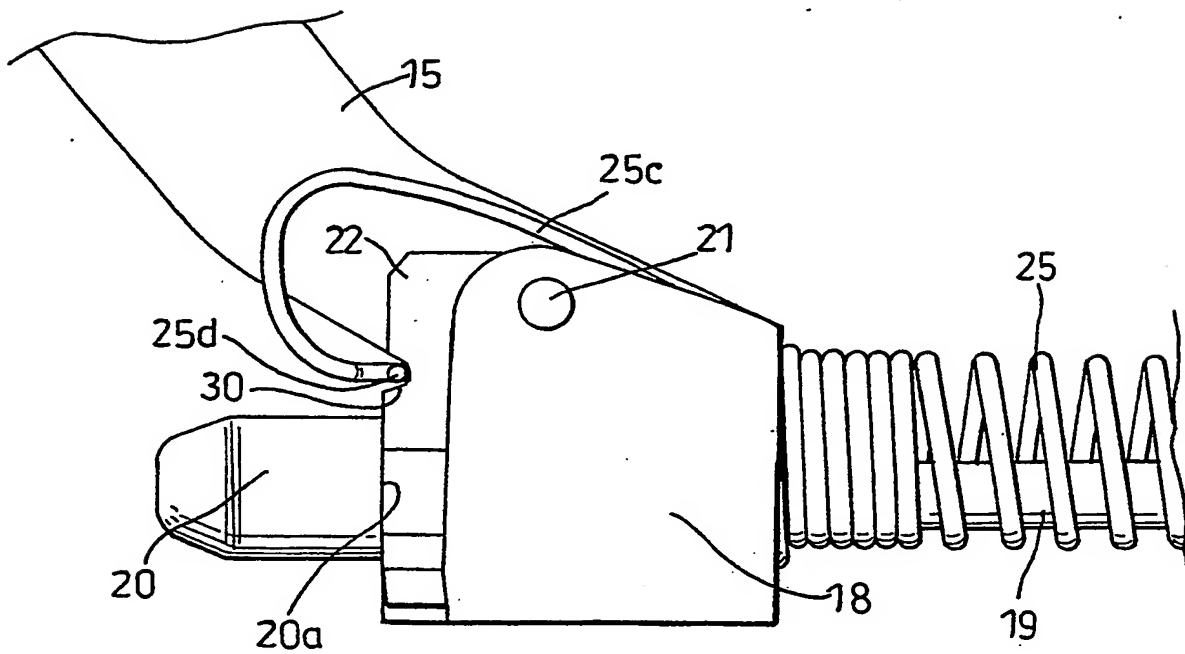

5/6

**Fig. 2****Fig. 8**

6/6

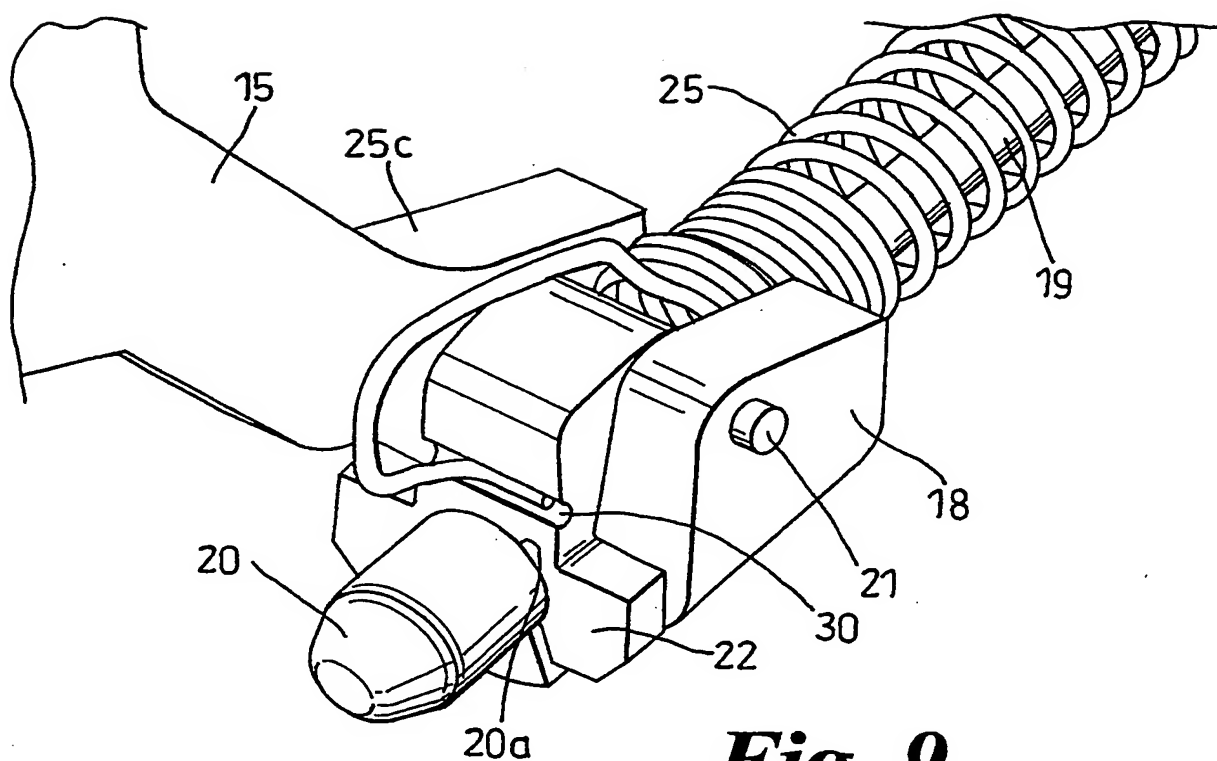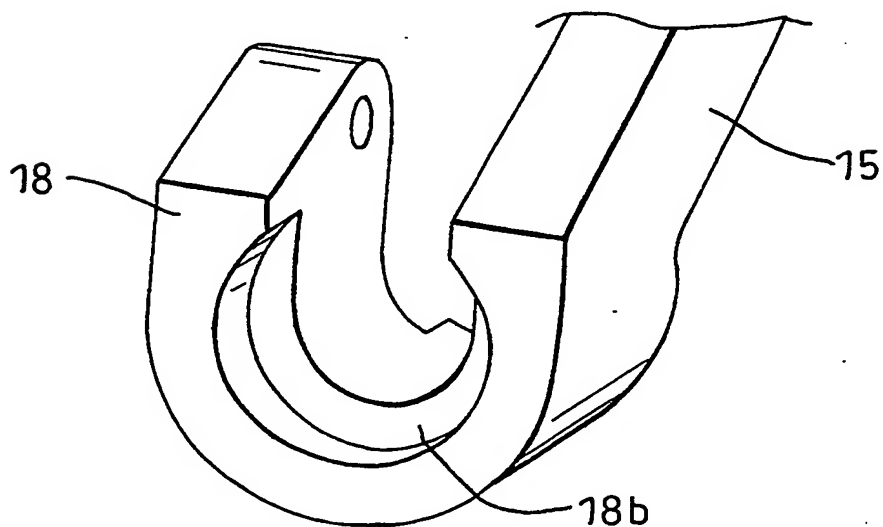**Fig. 9****Fig. 10**

INTERNATIONAL SEARCH REPORT

PCT/GB 03/02482

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16D65/18 F16D65/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16D F16C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 40640 A (AUTOMOTIVE PRODUCTS (ITALIA)) 17 September 1998 (1998-09-17) cited in the application figures	1
A	US 6 105 732 A (VENETOS) 22 August 2000 (2000-08-22) column 3, line 5 - line 62; figures	1

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

26 September 2003

Date of mailing of the international search report

02/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Becker, R

INTERNATIONAL SEARCH REPORT

PCT/GB 03/02482

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9840640	A	17-09-1998	AU 6226798 A BR 9804777 A EP 0917630 A1 GB 2328257 A ,B WO 9840640 A1 JP 2002514290 T	29-09-1998 17-08-1999 26-05-1999 17-02-1999 17-09-1998 14-05-2002
US 6105732	A	22-08-2000	NONE	

10/517884

INTERNATIONAL SEARCH REPORT

PCT/GB 03/02482

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16D65/18 F16D65/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16D F16C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 40640 A (AUTOMOTIVE PRODUCTS (ITALIA)) 17 September 1998 (1998-09-17) cited in the application figures	1
A	US 6 105 732 A (VENETOS) 22 August 2000 (2000-08-22) column 3, line 5 - line 62; figures	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

26 September 2003

Date of mailing of the international search report

02/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Becker, R

INTERNATIONAL SEARCH REPORT

PCT/GB 03/02482

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9840640	A	17-09-1998	AU 6226798 A	29-09-1998
			BR 9804777 A	17-08-1999
			EP 0917630 A1	26-05-1999
			GB 2328257 A , B	17-02-1999
			WO 9840640 A1	17-09-1998
			JP 2002514290 T	14-05-2002
US 6105732	A	22-08-2000	NONE	